


# THOR TECHNOLOGIES

INSTALLATION INSTRUCTIONS :

HLVD-1 COMBINED  
WITH DRM 95 - 20

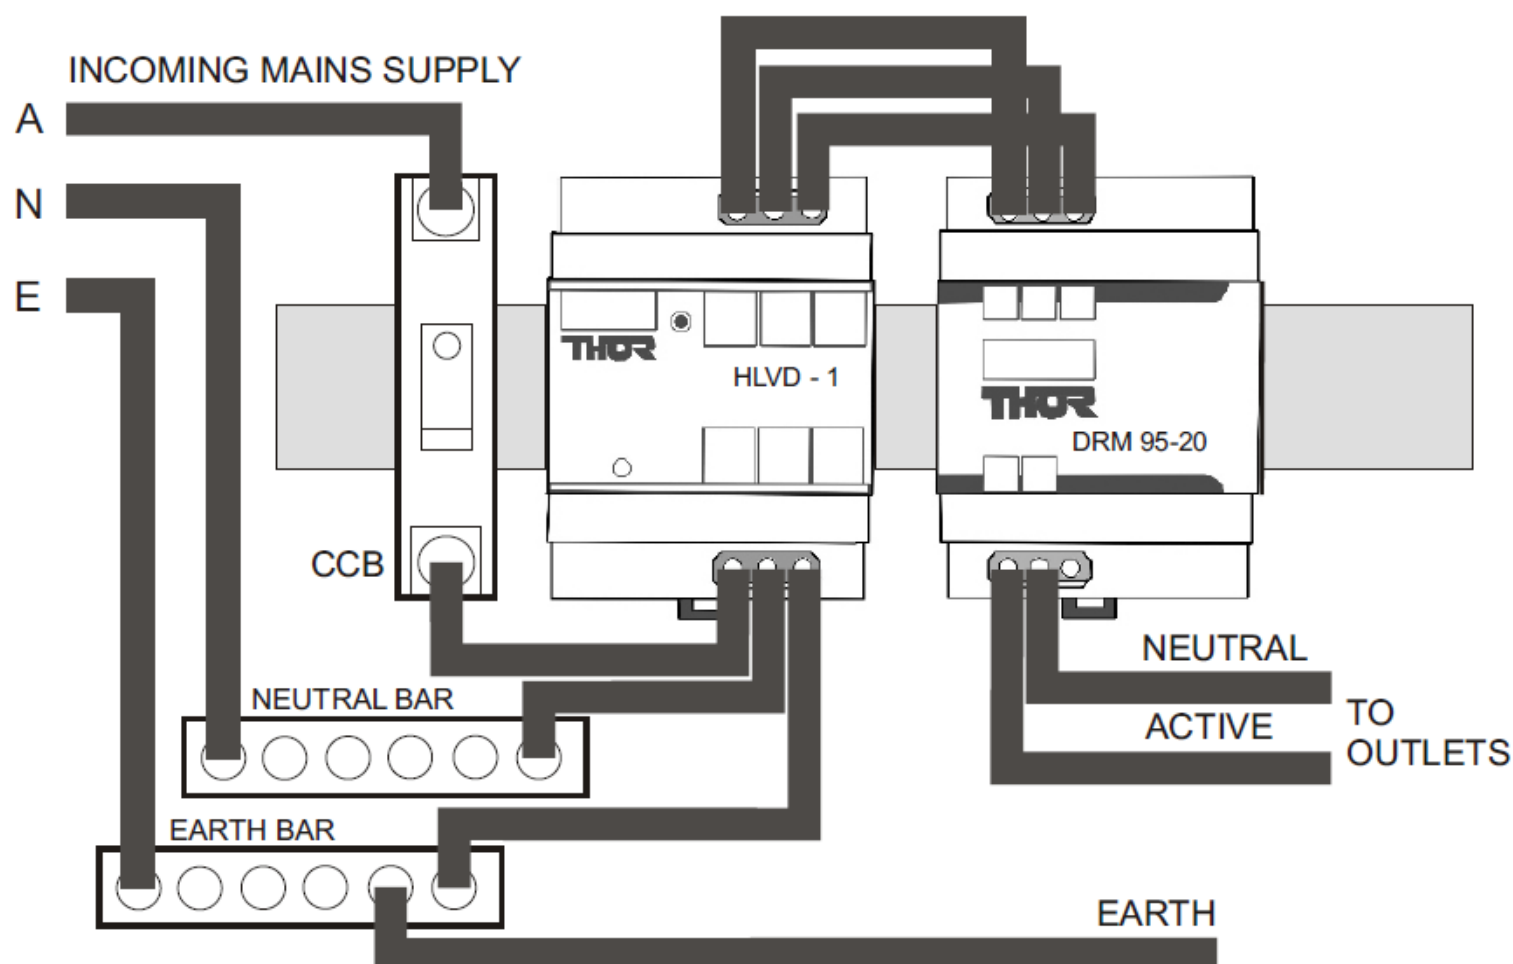

## TECHNICAL DETAILS

Nominal voltage: 240VAC

Maximum current: 20AMP

Frequency: 50Hz

Terminals capacity

Solid wire: 0.2 - 6

Stranded wire: 0.2 - 4

## CONNECTION DESCRIPTION

Click both the HLVD-1 and the DRM 95-20 onto a 35mm DIN hat rail. The mains supply can be connected to the bottom terminals of the HLVD-1 with a link from top to top on the DRM 95-20. Mains to the outlets is connected onto the bottom of the DRM 95-20. Earth wire can be omitted as it has not function for the internal circuit of the HLVD-1. The rating of circuit breaker has to be selected for the connected load of the circuit.

40-030-030-1